


# ADVANCE

## Specification

### ACCREDITATIONS

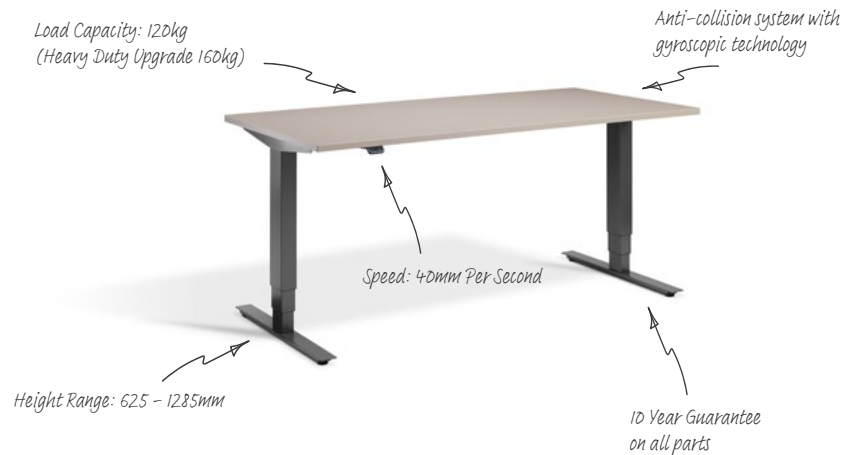

### THE DETAILS

#### Frame

Guarantee	10 years
Frame Width Adjustment	1150 - 1740mm
Height Range (Inc. 25mm Top)	625 - 1285mm (± 5mm)
Stroke	660mm
Side Bracket Depth	540mm
Foot Depth	690mm
Max Even Load Capacity	120kg (Heavy Duty Upgrade: 160kg)
Total Frame Weight	29kg
Operational Life	10,000 cycles at full rated load
Voltage	230V AC Input, 24V DC operation
Operational Speed	40mm per second

Standby Power	<0.3W
Max Operational Power	300W
Programmable Min/Max Height	Yes
Duty Cycle	10% - 2mins on, 18mins off
Noise Level	<42 dB
Anti-Collision	Yes
Compliance	

UKCA and CE Conformity, Machine Directive 2006/42/EC, EMC Directive 2014/30/EU, Low Voltage Directive 2014/35/EC, REACH, WEEE, RoHS 3 2015/863, EN 527-1:2011 Type A, EN 527-2:2016 ISO 21016, UL 962 ETL Listed

#### Desktop

Guarantee	10 years
Material	25mm MFC
Edging	2mm ABS
Compliance	FSC® Certified

#### Stock Sizes

1200 x 700mm, 1200 x 800mm, 1400 x 700mm, 1400 x 800mm, 1600 x 700mm, 1600 x 800mm, 1800 x 800mm

#### Packaging

Frame Package Size	840 x 380 x 120mm
Frame Package Weight	27kg
Frame Package Quantity	1

Top Package Size	(1300 - 1900) x 900 x 30mm
Top Package Weight	16 - 26kg
Top Package Quantity	1

#### Installation

Build Time (per unit)	20 - 30 mins
-----------------------	--------------

Suitable for self assembly	Yes
----------------------------	-----

# ADVANCE

## Finishes



### FRAME FINISHES



### DESKTOP DECORS

