

# SYNERGI

## Specification

### ACCREDITATIONS



### THE DETAILS

#### Frame


Guarantee		10 years
Frame Width Adjustment	2 Leg	1150 - 1740mm
	2 Leg +	2100 - 2600mm
	3 Leg	2295 - 3495mm
	4 Leg	3435 - 5235mm
Height Range (Inc. 25mm Top)		635 - 1135mm (± 5mm)
Stroke		500mm
Side Bracket Depth		720mm
Foot Depth		700mm or 900mm
Max Even Load Capacity	2 Leg	120kg
	2 Leg +	120kg
	3 Leg	160kg
	4 Leg	200kg
Total Frame Weight	2 Leg	46kg
	2 Leg +	51kg
	3 Leg	75kg
	4 Leg	104kg
Operational Life		10,000 cycles at full rated load
Voltage		230V AC Input, 24V DC operation
Operational Speed		40mm per second

#### Packaging

Frame Package Size	840 x 380 x 120mm (x1-3)
Frame Package Weight	50 - 120 kg (total)
Frame Package Quantity	1 - 3 (total)

#### Installation

Build Time (per unit)	30 - 60 mins
-----------------------	--------------

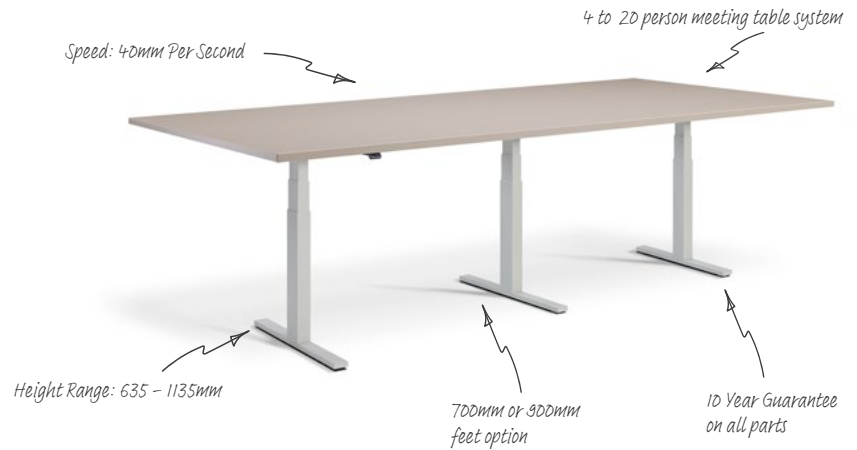

Standby Power	<0.3W
Max Operational Power	300 - 600W
Programmable Min/Max Height	Yes
Duty Cycle	10% - 2mins on, 18mins off
Noise Level	<42 dB
Anti-Collision	Yes
Compliance	

UKCA and CE Conformity, Machine Directive 2006/42/EC, EMC Directive 2014/30/EU, Low Voltage Directive 2014/35/EC, REACH, WEEE, RoHS 3 2015/863, EN 527-1:2011 Type A, EN 527-2:2016 ISO 21016, UL 962 ETL Listed

#### Desktop Compatibility

	Foot Size	Width	Depth
2 Leg	700mm	1210 - 2250mm	800 - 1200mm
	900mm	1210 - 2250mm	1200 - 1500mm
2 Leg +	700mm	2160 - 3100mm	800 - 1200mm
	900mm	2160 - 3100mm	1200 - 1500mm
3 Leg	700mm	2355 - 4000mm	800 - 1200mm
	900mm	2355 - 4000mm	1200 - 1500mm
4 Leg	700mm	3495 - 5750mm	800 - 1200mm
	900mm	3495 - 5750mm	1200 - 1500mm

Suitable for self assembly	Yes
----------------------------	-----

# SYNERGI

## Finishes



### FRAME FINISHES



### BESPOKE DESKTOPS

Thousands of bespoke desktop options are available to create a unique stamp on your collaboration area. Make it your own with custom structure, surface, formwork and finishes. Here's some inspiration!

